



Specification技术参数

Specification	Unit	JCM200
Drilling Performance		
Drilling Diameter (DTH)	mm	Φ105 ~ Φ273
Drill Depth (DTH by rod handler)	m	45
Drilling Angle	°	45-90
Feed system		
Feed Stroke	m	8
Feeding type		Motor-Chain
Feed Force	KN	0--40
Lifting Force	KN	80
Feed Speed	m/min	0--30
Hydraulic clamp		
Clamp range	mm	Φ76 ~ Φ200
Clamping Force	T	20
Torque	N.M	10000
Hydraulic Rod handler		
Q'ty Of Storage Rods	Pcs	6*φ102*6m
Mechanical Arm Grasping		Standard
Frame Body Mechanism		
Outrigger Cylinder stroke	mm	750
Body rotation	°	360
Power Head System		
Rotating Torque	N.m	10000
Rotation Speed	r/min	65--130
Power System		
Engine Brand		Weichai
Engine (National Iii)	KW	WP10-330-247
Main Oil Pump	CC	160-80-80-15
Hydraulic system		
System Pressure	Mpa	22
Hydraulic Oil Air-Cooled Radiator		Standard
Hydraulic Oil Water-Cooled Radiator		Standard
Balance Valve, Hydraulic Lock, Etc		Standard
Pilot Handle, Multi Way Valve, Twist Switch, Etc		Standard
Electronic Control System		
Wire Speed		IP56
Twist Switch		Standard
Walking Mechanism		
Traveling Motor		LTM40
Four Wheels With Specifications	MM	175pcs*500
Gradeability	°	21
Walking Speed	KM/h	1.5
Ground Pressure	kpa	75
Ground Clearance	mm	300
Auxiliary Mechanism		
Main Hydraulic Winch	T	1.5
Mud Pump		BW100
Water Pump		CM20
Lighting 24V Led	Pcs	5
Dust Collector		Standard
Overall Weight And Dimensions		
Transportation Status	mm	1150*2850*3800
Drilling Status	mm	6800*2850*11500
Weight	Ton	21.5

Main Structure主要结构

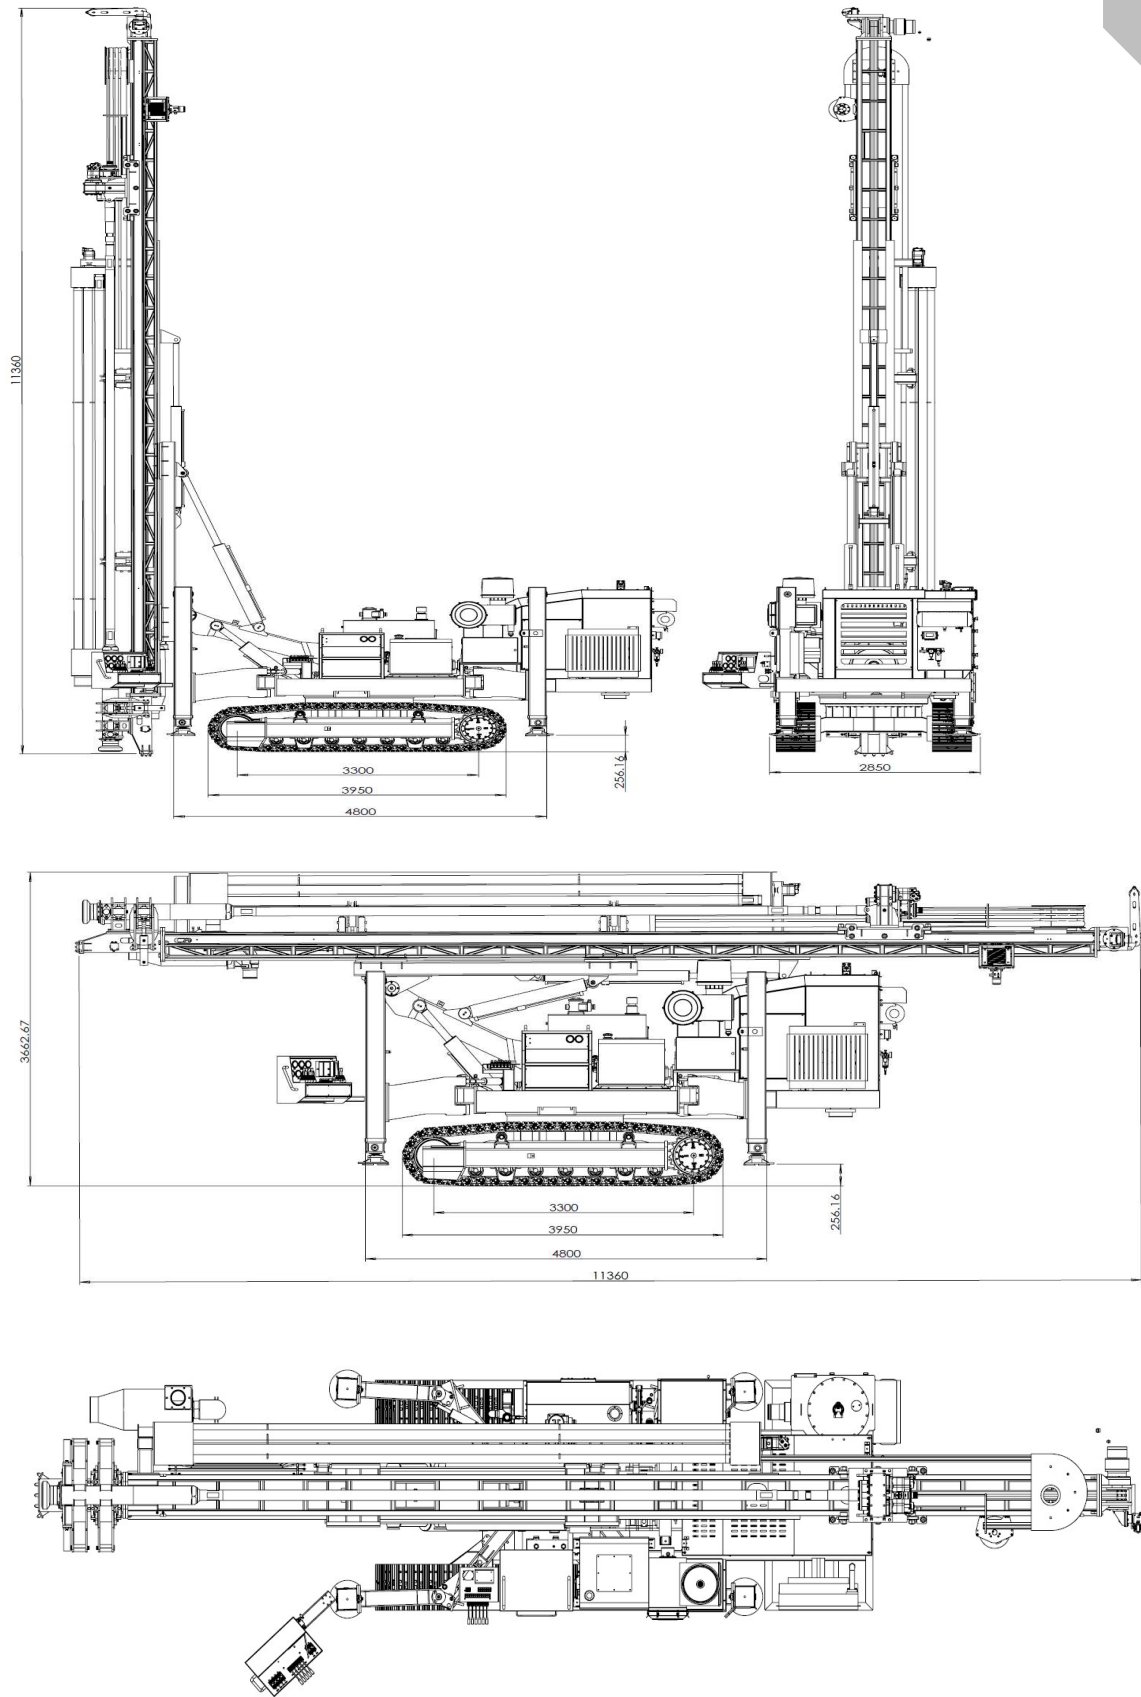

JCM200
MULTIFUNCTIONAL DRILLING RIG
多功能钻机

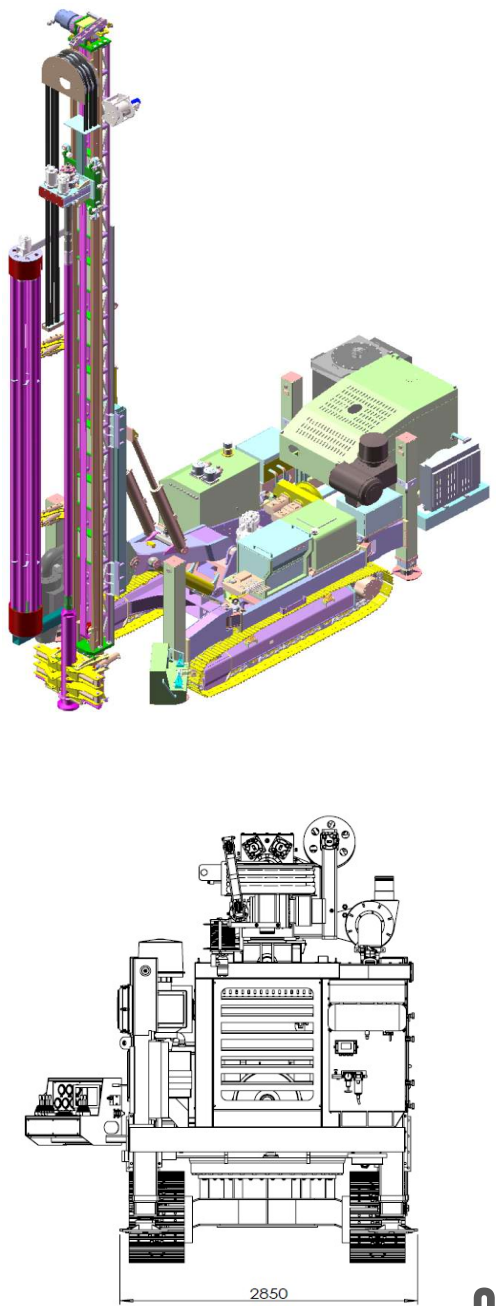

Main Structure主要结构

JCM200

